Installation Guide

Case components

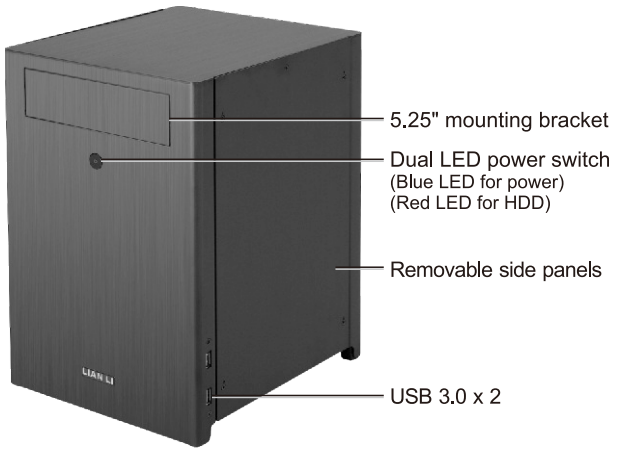

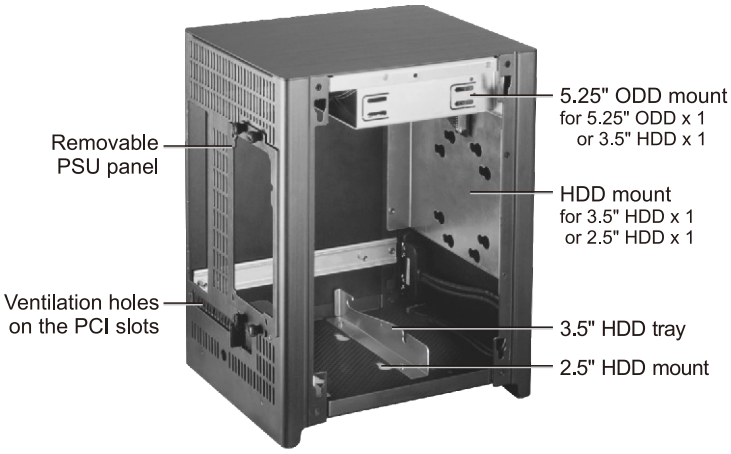

Hardware list

＊Extra quantities are spare parts.

Buzzer (1)	Screws M3*9.5 (8) for 2.5" HDD	Thumb screws (13) for 3.5" HDD	Screws (5) for PSU mounting
USB3.0 to USB2.0 converter (1)	Anti-vibration rubber rings (13) for 2.5" HDD / 3.5" HDD	Screws (5) for M/B	Clamp (1)
Cable ties (2)	Anti-vibration silica gel rings (4) for 3.5" HDD	Thumb screws (4) for ODD	Screws M3 (2) for side panel (spare part)

Remove side panels



Remove the screw on the top of the middle only.



Slide the panel upwards to release.



Lift up the side panel.

Motherboard installation

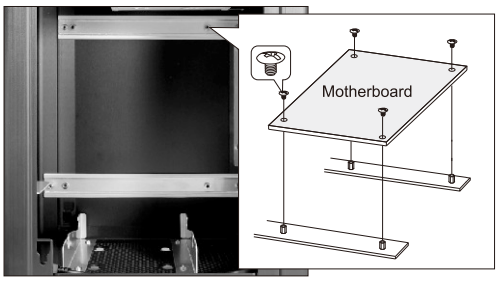

Place the M/B on the stand-off, fasten the screws to secure.

3.5" HDD installation-1



Fasten the HDD screws with anti-vibration silica gel rings to the HDD.



Slide the HDD into the HDD cage with the anti-vibration kit.



Press down the HDD into the slots to secure.

2.5" HDD installation-1



Install screws along with anti-vibration rubber rings onto the HDD.



Slide the HDD into the holes on the HDD platform.

Installing, optional, 140mm or 120mm fan & air filter



Loose 4 screws to remove the 3.5" HDD tray.



Option kit:

120mm fan / air filter(**PT-AF-12-3B**)
or
140mm fan / air filter(**PT-AF-14-3B**)



Put the option kit into the case bottom.



Fasten 4 screws to secure.

3.5" HDD installation-2



Install screws along with anti-vibration rubber rings on the HDD.



Slide the HDD into place on the HDD platform.

2.5" HDD installation-2



Install screws along with anti-vibration rubber rings onto the HDD.



Slide the HDD into the holes on the HDD platform.

ODD installation



Push to release the mounting bracket.



Push the ODD into the 5.25" rack.



Fasten 4 thumb screws to secure.

3.5" HDD installation-3



Install screws along with anti-vibration rubber rings onto the HDD.



Slide the HDD into the holes on the HDD platform.

Installing, optional, 5.25" aluminum bezel

Loose left / right screws to release 5.25" rack.

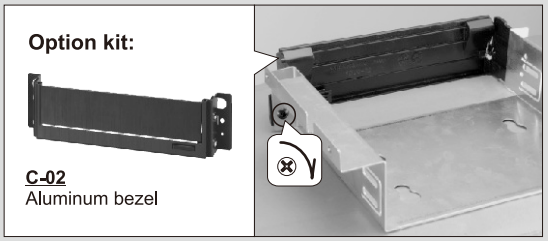

Put the aluminum bezel, fasten 2 screws to secure.



Insert the ODD, fasten screws to secure.

PSU installation



Loose 4 thumb screws to remove the PSU mounting bracket.



Assembly power supply with PSU mounting bracket.

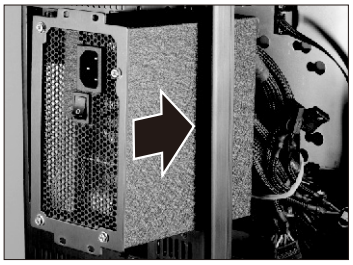

Push in gently.

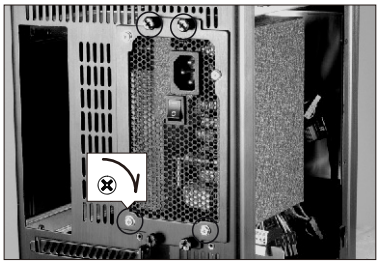

Fasten 4 thumb screws to secure.

I/O port installation

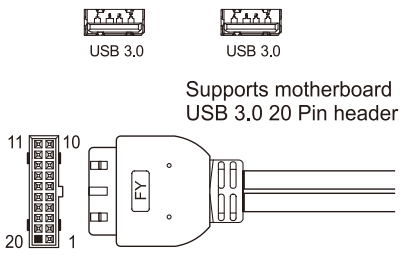

USB 3.0 to USB 2.0 converter

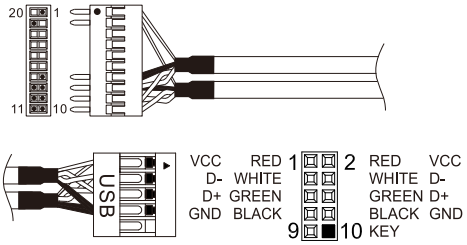

Cable installation guide